


PL Series LED Panel

CCT-125-60120-58W
60120 LED Panel Light




Products Description

General	CCT	6000K	4000K	3000K
	Lumen Output(lm)±5%	6032	7154	5684
	Lumen Efficacy(LPS)±5%	104	123	98
	LED Type/Qt'y	SMD 2835 / 216pcs(WW-108PCS;CW-108PCS)		
	CRI/SDCM	>80/<6		
Electrical	Rated Power(w)±5%	58W		
	Rated/Actual Input	200~240Vac 50/60Hz		
	Driver Output Data	25-38Vdc / 52.2W		
	Driver/Connection	Removable Driver / PIP		
	Power Factor/THD/PE	>90%/<15%/88%		
	Hi-pot Test Range	SELV Isolated Driver, 3750Vdc/5mA/60S		
Life	Warranty	3 years		
	Life Hours L90/L80	30,000 hrs/50,000hrs		
	LM80	90% lumen maintance @ 6,000hrs		
Others	Frame Color RAL	white		
	IP/IK/Glow-wire	IP20/IK03/650°C		
	Temp./Humidity	Working:-30°C~40°C Storage:<60°C/<75%		
	Net/Gross Weight	6.58kg /7.85kg		

Products Dimens


Certification:

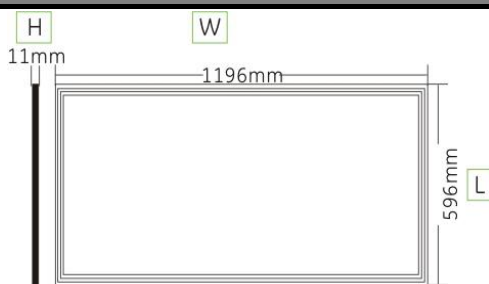

Panel: L=596mm W=1196mm H=11mm






AVERAGE AND CENTER E Figure

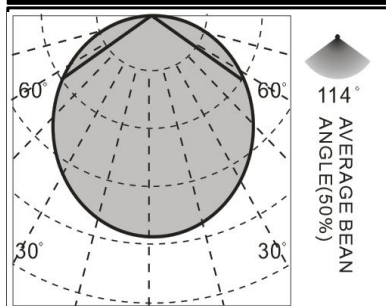

AVERAGE AND CENTER E Figure


1.0 m	2423.45 lx	2.88 m
1.5 m	1077.10 lx	4.35 m
2.0 m	605.86 lx	5.80 m
2.5 m	387.76 lx	7.28 m
3.0 m	269.28 lx	8.75 m
High illuminance		Diameter

Installation



PL Series LED Panel

CCT-115-60120-58W
60120 LED Panel Light



Products Description

General	CCT	6000K	4000K	3000K
	Lumen Output(lm)±5%	5684	6728	5336
	Lumen Efficacy(LPS)±5%	98	116	92
	LED Type/Qt'y	SMD 2835 / 216pcs(WW-108PCS;CW-108PCS)		
	CRI/SDCM	>80/<6		
Electrical	Rated Power(w)±5%	58W		
	Rated/Actual Input	100~277Vac 50/60Hz		
	Driver Output Data	25-38Vdc / 52.2W		
	Driver/Connection	Removable Driver / PIP		
	Power Factor/THD/PE	>90%/<15%/88%		
	Hi-pot Test Range	SELV Isolated Driver, 3750Vdc/5mA/60S		
Life	Warranty	3 years		
	Life Hours L90/L80	30,000 hrs/50,000hrs		
	LM80	90% lumen maintance @ 6,000hrs		
Others	Frame Color RAL	white		
	IP/IK/Glow-wire	IP20/IK03/650°C		
	Temp./Humidity	Working:-30°C~40°C Storage:<60°C/<75%		
	Net/Gross Weight	6.58kg /7.85kg		

Products Dimens


Certification:



Panel: L=596mm W=1196mm H=11mm




AVERAGE AND CENTER E Figure

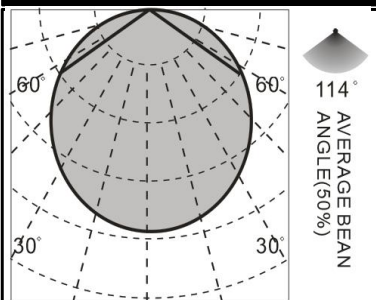

AVERAGE AND CENTER E Figure


1.0 m	2279.14 lx	2.88 m
1.5 m	1012.96 lx	4.35 m
2.0 m	569.79 lx	5.80 m
2.5 m	364.67 lx	7.28 m
3.0 m	253.24 lx	8.75 m
High illuminance		Diameter

Installation

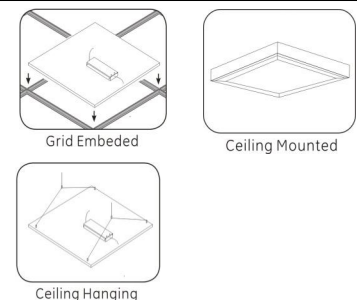

PL Series LED Panel

CCT-105-60120-58W
60120 LED Panel Light




Products Description

General	CCT	6000K	4000K	3000K
	Lumen Output(lm)±5%	5742	5887	5394
	Lumen Efficacy(LPS)±5%	99	116	93
	LED Type/Qt'y	SMD 2835 / 216pcs		
	CRI/SDCM	>80/<6		
Electrical	Rated Power(w)±5%	58W		
	Rated/Actual Input	100~277Vac 50/60Hz		
	Driver Output Data	25-38Vdc / 52.2W		
	Driver/Connection	Removable Driver / PIP		
	Power Factor/THD/PE	>90%/<15%/88%		
	Hi-pot Test Range	SELV Isolated Driver, 3750Vdc/5mA/60S		
Life	Warranty	3 years		
	Life Hours L90/L80	30,000 hrs/50,000hrs		
	LM80	90% lumen maintance @ 6,000hrs		
Others	Frame Color RAL	white		
	IP/IK/Glow-wire	IP20/IK03/650°C		
	Temp./Humidity	Working:-30°C~40°C Storage:<60°C/<75%		
	Net/Gross Weight	6.58kg /7.85kg		

Products Dimens


Certification:

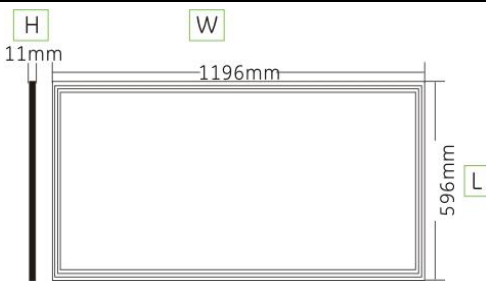

Panel: L=596mm W=1196mm H=11mm




AVERAGE AND CENTER E Figure

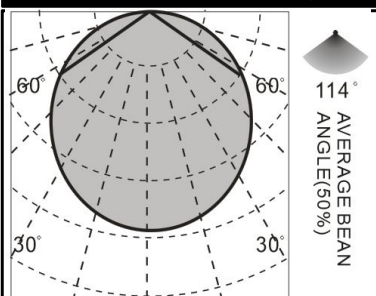

AVERAGE AND CENTER E Figure


1.0 m	1994.25 lx	2.88 m
1.5 m	886.34 lx	4.35 m
2.0 m	498.56 lx	5.80 m
2.5 m	319.09 lx	7.28 m
3.0 m	221.59 lx	8.75 m
High	illuminance	Diameter

Installation

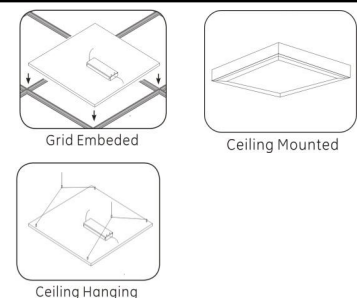

PL Series LED Panel

CCT-95-60120-60W
60120 LED Panel Light




Products Description

General	CCT	6000K	4000K	3000K
	Lumen Output(lm)±5%	4800	5619	4560
	Lumen Efficacy(LPS)±5%	80	95	76
	LED Type/Qt'y	SMD 2835 / 216pcs(WW-108PCS;CW-108PCS)		
	CRI/SDCM	>80/<6		
Electrical	Rated Power(w)±5%	60W		
	Rated/Actual Input	100~277Vac 50/60Hz		
	Driver Output Data	25-38Vdc / 54W		
	Driver/Connection	Removable Driver / PIP		
	Power Factor/THD/PE	>90%/<15%/88%		
	Hi-pot Test Range	SELV Isolated Driver, 3750Vdc/5mA/60S		
Life	Warranty	3 years		
	Life Hours L90/L80	30,000 hrs/50,000hrs		
	LM80	90% lumen maintance @ 6,000hrs		
Others	Frame Color RAL	white		
	IP/IK/Glow-wire	IP20/IK03/650°C		
	Temp./Humidity	Working:-30°C~40°C Storage:<60°C/<75%		
	Net/Gross Weight	6.58kg /7.85kg		

Products Dimens


Certification:

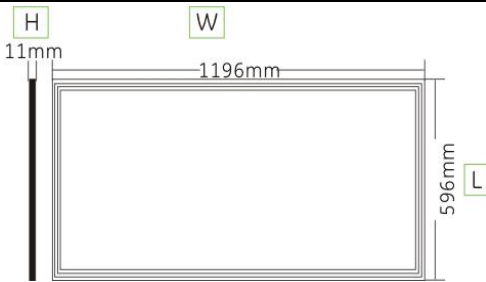

Panel: L=596mm W=1196mm H=11mm



AVERAGE AND CENTER E Figure

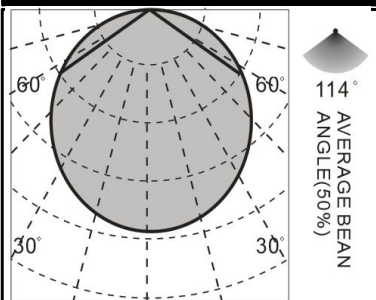

AVERAGE AND CENTER E Figure

1.0 m	1903.46 lx	2.88 m
1.5 m	845.99 lx	4.35 m
2.0 m	475.87 lx	5.80 m
2.5 m	304.56 lx	7.28 m
3.0 m	211.50 lx	8.75 m
High illuminance		Diameter

Installation

